


COMPLETE Pre-Cut Kit



Nobody likes to wait for the bus in the rain. This mini shelter makes an excellent escape from the elements at the end of your driveway for your kids while they wait for their bus.

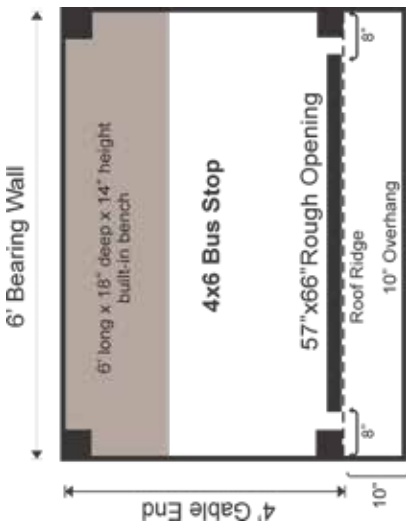

COMPLETE PRE-CUT KIT:

A weather tight shell. The PCK is the complete kit for a design. It includes everything required to assemble the building shell and includes doors and windows.

EVERY KIT INCLUDES

- Color Coded
- Part Numbered
- Step-by-Step Instructions
- & All Fastening Hardware Included

Configure Yours at

WWW.JAMAICACOTTAGESHOP.COM

4X6 BUS STOP

STORAGE
SOLUTIONS



4X6 BUS STOP COMPLETE PRE-CUT KIT

Base Area: 24 sq. ft.

Total Interior Area: 24 sq. ft.

Recommended Foundation:

3-4" Crushed Gravel

Overall Dimensions: 8'6"H
x 6'10"W x 6'5"D

Estimated Weight: 1000 lbs

Floor System

2 (qty) 4x6x6' Hemlock Skids

2"x6" rough sawn Hemlock
Joists 24" On Center

1" rough sawn Hemlock Decking

Floor Weight Rating: 25 lbs/sq. ft.

Walls

4"x4" Hemlock Post and
Beam Wall Framing

Wall Height: Front: 80" Rear: 50"

Siding: 1" rough sawn Pine Board

1" rough sawn Pine Corner &
Door Trim & 1" rough sawn
Pine Fascia & Shadow Trim

Roof

Saltbox Roof Style

Roof Pitch: Front: 8/12 Rear: 8/12 8/12

The complete pre-cut kit includes hemlock framing, pine board and batten siding, floor decking, corrugated metal roof, and a built-in bench. Note: Pictures may reflect client upgrades and modifications that do not come standard.

2"x6" rough sawn Hemlock
Rafters 24" On Center

1"x6" rough sawn Hemlock
Exposed Collar Ties

1"x4" rough sawn Hemlock
Strapping 20" On Center

Corrugated 29g Metal
Roofing, Color: Evergreen

10" Front Overhang

Rough Opening:

1 (qty) 57"W x 66"H

Additional Features

6' Long x 18" Deep x 14" High
rough sawn Pine Bench

Assembly & Logistics Information

Estimated Assembly Time:

One Person: 12 hrs

Estimated Shipping Cube Sizes

Cube 1: 42"x32"x96"

BSTP.4X6.PCK