


FULLY ASSEMBLED



The Gable is a strong and sturdy storage shed built with traditional 4x4 post and beam barn style. The design is simple and blends into its surroundings or can be dressed up with customizations to create a structure that matches your personality.

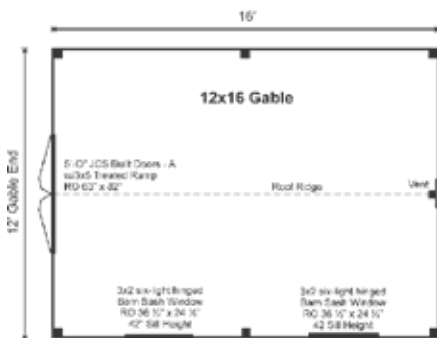

FULLY ASSEMBLED:

A weather tight shell. Specifications are the same as a PCK. Fully assembled prefabricated sheds and cottage buildings deliver exclusively to the northeast USA.

EVERY KIT INCLUDES

- Color Coded
 - Part Numbered
 - Step-by-Step Instructions
- & All Fastening Hardware Included

Additional Sizes:

8X8 | 8X10 | 8X12 | 8X14 | 8X16 | 10X8 | 10X10 | 10X12 | 10X14 | 10X16 | 10X18 | 10X20 | 12X12 | 12X14 | 12X16 | 12X20 | 12X24

Additional Types:

FRAME ONLY KIT | COMPLETE KIT | FULLY ASSEMBLED | 3-SEASON KIT | 4-SEASON KIT

Configure Yours at

WWW.JAMAICACOTTAGESHOP.COM

12X16 GABLE

STORAGE SOLUTIONS



12X16 GABLE FULLY ASSEMBLED

Base Area: 192 sq. ft.

Total Interior Area: 192 sq. ft.

Recommended Foundation: 6–8" Crushed Gravel

Overall Dimensions: 10'6"H x 13'2"W x 17'2"D

Estimated Weight: 5300 lbs

Floor System

2 (qty) 6x6x16' Hemlock Skids

2"x6" rough sawn Hemlock Joists 24" On Center

¾" CDX Plywood Floor Decking
Floor Weight Rating: 25 lbs/sq. ft.

Walls

4"x4" Hemlock Post and Beam Wall Framing

Wall Height: 82"

Siding: 1" rough sawn Pine Board & Batten

1" rough sawn Pine Corner, Door & Window Trim & 2" rough sawn Pine Fascia & Shadow Trim

Roof

Gable Roof Style

The fully assembled unit includes hemlock framing, pine board and batten siding, floor decking, corrugated metal roof, double doors and windows. Note: Pictures may reflect client upgrades and modifications that do not come standard.

Roof Pitch: 4/12

2"x6" rough sawn Hemlock Rafters 24" On Center

1"x6" rough sawn Hemlock Exposed Collar Ties

1"x4" rough sawn Hemlock Strapping 20" On Center

Corrugated 29g Metal Roofing, Color: Evergreen

Doors & Windows:

Doors: 1 (qty) 5-0 JCS-built 2" Thick rough sawn Pine Double Doors w/ 3x5 Pressure Treated Ramp

Windows: 2 (qty) 3'x2' eight-lite Hinged Barn Sash Window

Additional Features

1 (qty) Wood Louvered Vent

Delivery & Logistics Information

Fully Assembled prefabricated sheds and cottage buildings are deliverable exclusively to the Northeast USA.

GBL.12X16.FA

STORAGE SOLUTIONS