


# FULLY ASSEMBLED



The Gable is a strong and sturdy storage shed built with traditional 4x4 post and beam barn style. The design is simple and blends into its surroundings or can be dressed up with customizations to create a structure that matches your personality.

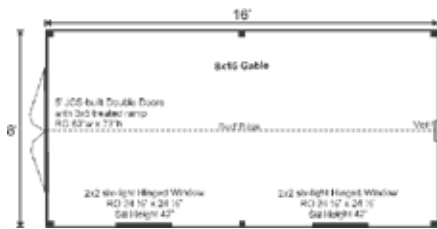

## FULLY ASSEMBLED:

A weather tight shell. Specifications are the same as a PCK. Fully assembled prefabricated sheds and cottage buildings deliver exclusively to the northeast USA.

## EVERY KIT INCLUDES

- Color Coded
- Part Numbered
- Step-by-Step Instructions
- & All Fastening Hardware Included

### Additional Sizes:

8X8 | 8X10 | 8X12 | 8X14 | 8X16 | 10X8 | 10X10 | 10X12 | 10X14 | 10X16 | 10X18 | 10X20 | 12X12 | 12X14 | 12X16 | 12X20 | 12X24

### Additional Types:

FRAME ONLY KIT | COMPLETE KIT | FULLY ASSEMBLED | 3-SEASON KIT | 4-SEASON KIT

Configure Yours at

[WWW.JAMAICACOTTAGESHOP.COM](http://WWW.JAMAICACOTTAGESHOP.COM)

## 8X16 GABLE

STORAGE SOLUTIONS



## 8X16 GABLE FULLY ASSEMBLED

Base Area: 128 sq. ft.

Total Interior Area: 128 sq. ft.

Recommended Foundation:  
4-6" Crushed Gravel

Overall Dimensions: 10'6"H  
x 9'2"W x 17'2"D

Estimated Weight: 3800 lbs

### Floor System

2 (qty) 6x6x16' Hemlock Skids

2"x6" rough sawn Hemlock  
Joists 24" On Center

3/4" CDX Plywood Floor Decking  
Floor Weight Rating: 25 lbs/sq. ft.

### Walls

4"x4" Hemlock Post and  
Beam Wall Framing

Wall Height: 82"

Siding: 1" rough sawn  
Pine Board & Batten

1" rough sawn Pine Corner, Door  
& Window Trim & 2" rough sawn  
Pine Fascia & Shadow Trim

### Roof

Gable Roof Style

The fully assembled unit includes hemlock framing, pine board and batten siding, floor decking, corrugated metal roof, double doors and windows. Note: Pictures may reflect client upgrades and modifications that do not come standard.

Roof Pitch: 6/12

2"x6" rough sawn Hemlock  
Rafters 24" On Center

1"x6" rough sawn Hemlock  
Exposed Collar Ties

1"x4" rough sawn Hemlock  
Strapping 20" On Center

Corrugated 29g Metal  
Roofing, Color: Evergreen

### Doors & Windows:

Doors: 1 (qty) 5-0 JCS-built 2" Thick  
rough sawn Pine Double Doors  
w/ 3x5 Pressure Treated Ramp

Windows: 2 (qty) 2'x2' six-lite  
Hinged Barn Sash Window

### Additional Features

1 (qty) Wood Louvered Vent

### Delivery & Logistics Information

Fully Assembled prefabricated sheds and cottage buildings are deliverable exclusively to the Northeast USA.

GBL.8X16.FA

STORAGE SOLUTIONS