


# COMPLETE Pre-Cut Kit



A traditional New England design, the Sugar Shack boasts functionality and aesthetic appeal. Sugar Shacks are traditionally used as a designated building to boil maple syrup. In the springtime a large cloud of smoke and steam can be seen rising high above a sugar shack.

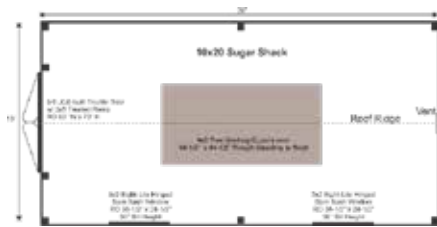

## COMPLETE PRE-CUT KIT:

A weather tight shell. The PCK is the complete kit for a design. It includes everything required to assemble the building shell and includes doors and windows.

## EVERY KIT INCLUDES

- Color Coded
- Part Numbered
- Step-by-Step Instructions
- & All Fastening Hardware Included

### Additional Sizes:

8X10 | 8X12 | 8X14 | 8X16 | 10X16 | 10X20 | 12X16 | 12X20 | 12X24 | 14X20 | 14X24 | 16X20 | 16X24 | 16X30 | 12X30 | 20X40 |

### Additional Types:

FRAME ONLY KIT | COMPLETE KIT | FULLY ASSEMBLED | 3-SEASON KIT | 4-SEASON KIT

Configure Yours at

[WWW.JAMAICACOTTAGESHOP.COM](http://WWW.JAMAICACOTTAGESHOP.COM)

# 10X20 SUGAR SHACK

STORAGE SOLUTIONS



## 10X20 SUGAR SHACK COMPLETE PRE-CUT KIT

Base Area: 200 sq. ft.

Total Interior Area: 200 sq. ft.

Recommended Foundation:  
6-8" Crushed Gravel

Overall Dimensions: 12'3"H  
x 11'2"W x 21'2"D

Estimated Weight: 5800 lbs

### Sill Plates

6x6 Treated Sill Plate

### Walls

4"x4" Hemlock Post and  
Beam Wall Framing

Wall Height: 78"

Siding: 1" rough sawn  
Pine Board & Batten

1" rough sawn Pine Corner, Door  
& Window Trim & 2" rough sawn  
Pine Fascia & Shadow Trim

### Roof

Gable Roof Style

Roof Pitch: 6/12

Roof Features: 4x8 Pine Venting  
Cupola over 94 1/2"x44 1/2"  
Rough Opening in Roof

The complete pre-cut kit includes hemlock framing, pine board and batten siding, floor decking, corrugated metal roof, cupola, double doors and barn sash windows. Note: Pictures may reflect client upgrades and modifications that do not come standard.

2"x6" rough sawn Hemlock  
Rafters 24" On Center

1"x6" rough sawn Hemlock  
Exposed Collar Ties

1"x4" rough sawn Hemlock  
Strapping 20" On Center

Corrugated 29g Metal  
Roofing, Color: Evergreen

### Doors & Windows:

Doors: 1 (qty) 5-0 JCS-built 2" Thick  
rough sawn Pine Double Doors  
w/ 3x5 Pressure Treated Ramp

Windows: 2 (qty) 3'x2' eight-lite  
Hinged Barn Sash Window

### Additional Features

1 (qty) Wood Louvered Vent

### Assembly & Logistics Information

Estimated Assembly Time:  
Two People: 36 hrs

Estimated Shipping Cube Sizes

Cube 1: 42"x32"x168"

Cube 2: 42"x40"x144"

SUGSHK.10X20.PCK