


FULLY ASSEMBLED



Our Camp Alcove was fashioned after traditional Adirondack style lean-to's. Our shelter includes a generous overhang and a built-in bench for ample seating and camping gear storage.

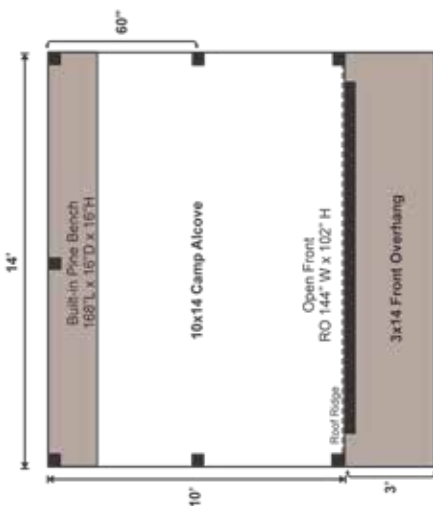

FULLY ASSEMBLED:

A weather tight shell. Specifications are the same as a PCK. Fully assembled prefabricated sheds and cottage buildings deliver exclusively to the northeast USA.

EVERY KIT INCLUDES

- Color Coded
- Part Numbered
- Step-by-Step Instructions
- & All Fastening Hardware Included

Configure Yours at

WWW.JAMAICACOTTAGESHOP.COM

10X14 CAMP ALCOVE

STORAGE SOLUTIONS



10X14 CAMP ALCOVE FULLY ASSEMBLED

Base Area: 140 sq. ft.

Total Interior Area: 140 sq. ft.

Recommended Foundation:
6–8" Crushed Gravel

Overall Dimensions: 10'6"H
x 13'10"W x 15'2"D

Estimated Weight: 4800 lbs

Floor System

2 (qty) 4x6x14' Hemlock Skids

2"x6" rough sawn Hemlock

Joists 24" On Center

1" rough sawn Hemlock Decking

Floor Weight Rating: 25 lbs/sq. ft.

Walls

4"x4" Hemlock Post and
Beam Wall Framing

Wall Height: Front: 108" Rear: 48"

Siding: 1" rough sawn

Pine Board & Batten

1" rough sawn Pine Corner &

Door Trim & 2" rough sawn

Pine Fascia & Shadow Trim

The fully assembled unit includes hemlock framing, pine board and batten siding, floor decking, corrugated metal roof, and a built-in bench. Note: Pictures may reflect client upgrades and modifications that do not come standard.

Roof

Saltbox Roof Style

Roof Pitch: Front: 12/12 Rear: 6/12

2"x6" rough sawn Hemlock

Rafters 24" On Center

1"x6" rough sawn Hemlock

Exposed Collar Ties

1"x4" rough sawn Hemlock

Strapping 20" On Center

Corrugated 29g Metal

Roofing, Color: Evergreen

36" Front Overhang with Angle Braces

Rough Opening:

1 (qty) 144"W x 102"H

Delivery & Logistics Information

Fully Assembled prefabricated sheds and cottage buildings are deliverable exclusively to the Northeast USA.

CAMP.10X14.FA

©2021 Jamaica Cottage Shop, Inc. • 1-802-210-1249 • www.JamaicaCottageShop.com

STORAGE SOLUTIONS