
FULLY ASSEMBLED

12X16 CHURCH STREET

STORAGE SOLUTIONS



We took our Saltbox shed and gave it some flair. The roofing is upgraded to architectural asphalt shingles with a copper roll ridge cap and the siding is horizontal Eastern White pine clapboard.




FULLY ASSEMBLED:

A weather tight shell. Specifications are the same as a PCK. Fully assembled prefabricated sheds and cottage buildings deliver exclusively to the northeast USA.



Configure Yours at
WWW.JAMAICACOTTAGESHOP.COM

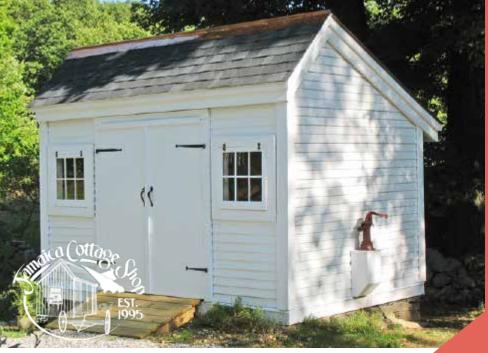

12X16 CHURCH STREET FULLY ASSEMBLED

Base Area: 192 sq. ft.

Total Interior Area: 192 sq. ft. Recommended Foundation: 6–8" Crushed Gravel

Overall Dimensions: $10'6"H \times 17'2"W \times 13'2"D$

Estimated Weight: 5300 lbs

Floor System

2 (qty) 6"x6"x16' Hemlock Skids 2"x6" rough sawn Hemlock Joists 24" On Center 34" CDX Plywood Floor Decking Floor Weight Rating: 25 lbs/sq. ft.

Walls

4"x4" Hemlock Post and Beam Wall Framing Wall Height: Front: 83" Rear: 67" Siding: Horizontal Pine Clapboard

1" rough sawn Pine Corner, Door & Window Trim & 2" rough sawn Pine Fascia & Shadow Trim

Roof

Saltbox Roof Style

The fully assembled unit includes hemlock framing, pine clapboard siding, floor decking, corrugated metal roof, windows and doors. Note: Pictures may reflect client upgrades and modifications that do not come standard.

Roof Pitch: Front: 12/12 Rear: 4/12

2"x6" rough sawn Hemlock Rafters 24" On Center

1"x6" rough sawn Hemlock Exposed Collar Ties

1" rough sawn Solid Barn Board Roof Sheathing

Black Architectural Asphalt Shingles with Copper Roll Ridge Cap

Doors & Windows:

Door: 1 (qty) 5-0 JCS-built 2"Thick rough sawn Pine Double Doors w/ 3x5 Pressure Treated Ramp

Windows: 2 (qty) 2'x2' six-lite Hinged Barn Sash Window

Additional Features

1 (aty) Wood Louvered Vent

Delivery & Logistics Information

Fully Assembled prefabricated sheds and cottage buildings are deliverable exclusively to the Northeast USA.

CHURCH.12X16.FA