
COMPLETEPre-Cut Kit

12X16 CHURCH STREET

STORAGE SOLUTIONS



We took our Saltbox shed and gave it some flair. The roofing is upgraded to architectural asphalt shingles with a copper roll ridge cap and the siding is horizontal Eastern White pine clapboard.




COMPLETE PRE-CUT KIT:

A weather tight shell. The PCK is the complete kit for a design. It includes everything required to assemble the building shell and includes doors and windows.



Configure Yours at
WWW.JAMAICACOTTAGESHOP.COM

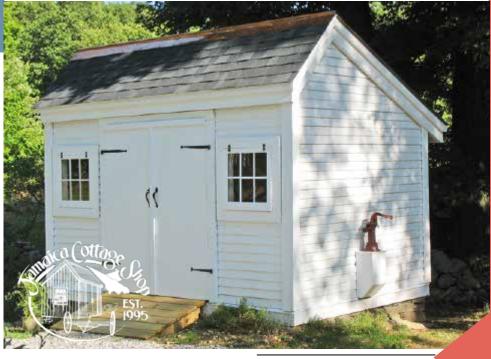

12X16 CHURCH STREET COMPLETE PRE-CUT KIT

Base Area: 192 sq. ft.

Total Interior Area: 192 sq. ft.

Recommended Foundation:

6–8" Crushed Gravel

Overall Dimensions: 10'6"H

x 17'2"W x 13'2"D

Estimated Weight: 5300 lbs

Floor System

2 (qty) 6"x6"x16' Hemlock Skids 2"x6" rough sawn Hemlock Joists 24" On Center

34" CDX Plywood Floor Decking Floor Weight Rating: 25 lbs/sq. ft.

Walls

4"x4" Hemlock Post and Beam Wall Framing

Wall Height: Front: 83" Rear: 67"

Siding: Horizontal Pine Clapboard

1" rough sawn Pine Corner, Door & Window Trim & 2" rough sawn Pine Fascia & Shadow Trim

Roof

Saltbox Roof Style
Roof Pitch: Front: 12/12 Rear: 4/12

The complete pre-cut kit includes hemlock framing, pine clapboard siding, floor decking, asphalt shingle roof roof, double doors and barn sash windows. Note: Pictures may reflect client upgrades and modifications that do not come standard.

2"x6" rough sawn Hemlock Rafters 24" On Center

1"x6" rough sawn Hemlock Exposed Collar Ties

1" rough sawn Solid Barn Board Roof Sheathing

Black Architectural Asphalt Shingles with Copper Roll Ridge Cap

Doors & Windows:

Door: 1 (qty) 5-0 JCS-built 2"Thick rough sawn Pine Double Doors w/ 3x5 Pressure Treated Ramp

Windows: 2 (qty) 2'x2' six-lite Hinged Barn Sash Window

Additional Features

1 (qty) Wood Louvered Vent

Assembly & Logistics Information

Estimated Assembly Time: Two People: 30 hrs

Estimated Shipping Cube Sizes

Cube 1: 42"x44"x192" Cube 2: 42"x16"x192"

CHURCH.12X16.PCK