


# FULLY ASSEMBLED



A New England staple, with colonial charm—the Saltbox begs the word “tradition.” Featuring a distinct asymmetrical roof style, it is not only elegant, but practical. This design allows rain and snow to shed off easily, mostly to the rear.

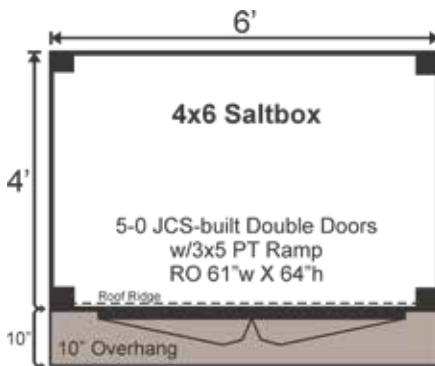

## FULLY ASSEMBLED:

A weather tight shell. Specifications are the same as a PCK. Fully assembled prefabricated sheds and cottage buildings deliver exclusively to the northeast USA.

## EVERY KIT INCLUDES

- Color Coded
- Part Numbered
- Step-by-Step Instructions
- & All Fastening Hardware Included

### Additional Sizes:

4X6 | 4X8 | 8X8 | 8X10 | 8X12 | 8X14 | 8X16 | 10X8 | 10X10 | 10X12 | 10X14 | 10X16 | 10X18 | 10X20 | 12X12 | 12X14 | 12X16 | 12X20 | 12X24

### Additional Types:

FRAME ONLY KIT | COMPLETE KIT | FULLY ASSEMBLED | 3-SEASON KIT | 4-SEASON KIT

Configure Yours at

[WWW.JAMAICACOTTAGESHOP.COM](http://WWW.JAMAICACOTTAGESHOP.COM)

## 4X6 SALTBOX

STORAGE SOLUTIONS



## 4X6 SALTBOX FULLY ASSEMBLED

Base Area: 24 sq. ft.

Total Interior Area: 24 sq. ft.

Recommended Foundation:  
3–4" Crushed Gravel

Overall Dimensions: 8'6"H  
x 6'6"W x 6'9"D

Estimated Weight: 1700 lbs

### Floor System

2 (qty) 4x6x6' Hemlock Skids

2"x6" rough sawn Hemlock  
Joists 24" On Center

¾" CDX Plywood Floor Decking

Floor Weight Rating: 25 lbs/sq. ft.

### Walls

4"x4" Hemlock Post and  
Beam Wall Framing

Wall Height: Front: 80" Rear: 48"

Siding: 1" rough sawn

Pine Board & Batten

1" rough sawn Pine Corner, Door,  
Window, Fascia & Shadow Trim

The fully assembled unit includes hemlock framing, pine board and batten siding, floor decking, a corrugated metal roof, and double doors with treated ramp. Note: Pictures may reflect client upgrades and modifications that do not come standard.

### Roof

Saltbox Roof Style

Roof Pitch: 8/12

2"x6" rough sawn Hemlock

Rafters 24" On Center

1"x6" rough sawn Hemlock

Exposed Collar Ties

1"x4" rough sawn Hemlock

Strapping 20" On Center

Corrugated 29g Metal

Roofing, Color: Evergreen

### Doors:

Door:s: 1 (qty) 5-0 JCS-built 2" Thick  
rough sawn Pine Double Doors  
w/ 3x5 Pressure Treated Ramp

### Delivery & Logistics Information

Fully Assembled prefabricated sheds and cottage buildings are deliverable exclusively to the Northeast USA.

SLBX.4X6.FA

©2021 Jamaica Cottage Shop, Inc. • 1-802-210-1249 • [www.JamaicaCottageShop.com](http://www.JamaicaCottageShop.com)

STORAGE SOLUTIONS