


FULLY ASSEMBLED



A remembrance of days gone by; this Cottage Shop original will surely enhance any landscape. Adorned with Western Red Cedar Shingles and completely functional, the Cedar bucket would actually draw water if there were any below it.

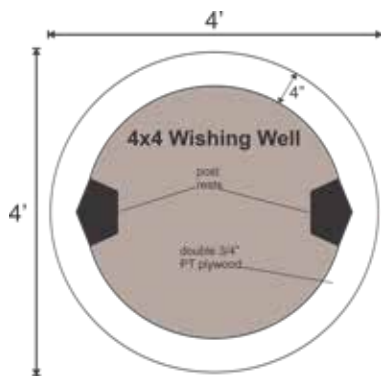

FULLY ASSEMBLED:

A weather tight shell. Specifications are the same as a PCK. Fully assembled prefabricated sheds and cottage buildings deliver exclusively to the northeast USA.

EVERY KIT INCLUDES

- Color Coded
- Part Numbered
- Step-by-Step Instructions
- & All Fastening Hardware Included

Additional Sizes:

8X10 | 8X12 | 8X14 | 8X16 |
10X8 | 10X10 | 10X12 | 10X14 | 10X16 | 10X20 |
12X12 | 12X14 | 12X16 | 12X18 | 12X20 | 12X24

Additional Types:

FRAME ONLY KIT | COMPLETE KIT |
3-SEASON KIT | 4-SEASON KIT

Configure Yours at

WWW.JAMAICACOTTAGESHOP.COM

4X4 WISHING WELL

STORAGE SOLUTIONS



The fully assembled unit includes a treated sill plate and hemlock framing, cedar shingle siding and roofing, and a pine bucket with rope. Note: Pictures may reflect client upgrades and modifications that do not come standard.

4X4 WISHING WELL FULLY ASSEMBLED

Base Area: 16 sq. ft.
Total Interior Area: 16 sq. ft.
Recommended Foundation:
3-4" Crushed Gravel
Overall Dimensions: 8'6"H
x 4'4"W x 4'4"D
Estimated Weight: 1200 lbs

Sill Plates

Pressure Treated Sill Plate*

Walls

4"x4" Hemlock Post and
Beam Wall Framing
Wall Height: 74"
Siding: Red Cedar Shingles
1" rough sawn Pine Trim,
Fascia and Shadow

Roof

Gable Roof Style
Roof Pitch: 6/12
2"x4" rough sawn Hemlock
Rafters 24" On Center
1"x6" rough sawn Hemlock
Exposed Collar Ties
1"x4" rough sawn Hemlock
Strapping 20" On Center
Red Cedar Shingles with
Cedar Shingle Ridge Cap
4" Overhangs on all sides

Additional Features

10" Pine Bucket with Rope

Delivery & Logistics Information

Fully Assembled prefabricated sheds and cottage buildings are deliverable exclusively to the Northeast USA.

WISH.4X4.FA

STORAGE SOLUTIONS